

FRONT



BACK



INCHES

SIZE in	Bust	Waist	Hip
XS	34.3	26.4	36.2
S	36.2	28.3	38.2
M	38.2	30.3	40.2
L	40.2	32.3	42.1
XL	42.1	34.3	44.1
XXL	44.1	36.2	46.1
XXXL	46.1	38.2	48

CENTIMETERS

SIZE cm	Bust	Waist	Hip
XS	87	67	92
S	92	72	97
M	97	77	102
L	102	82	107
XL	107	87	112
XXL	112	92	117
XXXL	117	97	122

Recommended fabrics: **lightweight wovens: polyester, cotton, viscose, satin, linen, challis, silk, crepe de chine.**


Before Starting

You can print sizes separately. You need to use ADOBE READER, which is free to download.

1 - Click the **layers icon** on the left side.



2- Click the **eye icon** of the size you want to hide. By default all sizes will be printed.

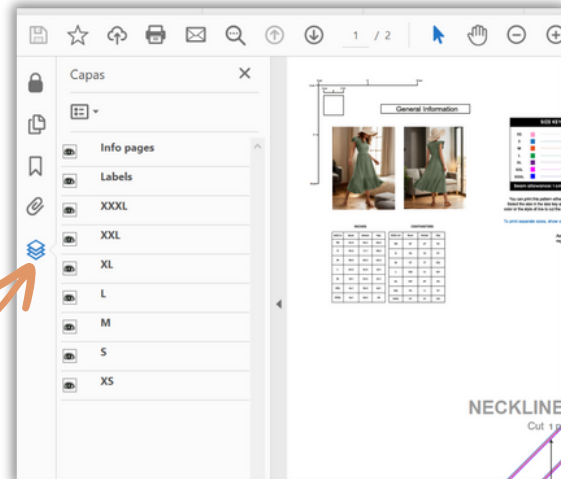

3- Print.

PRINTING OPTIONS:

Print Shop (A0 File):

Request a 100% scale print with no scaling or tiling. Verify accuracy using the test square on the pattern page.

Print at Home (A4 or US Letter File):

Our patterns are sized to fit correctly A4 and US Letter. Select "Actual Size." Print only the first page and measure the test box on the first page. If correct, proceed.

USEFUL Sewing Tips



Use a straight stitch

A straight stitch is the most basic and versatile stitch. Start with a simple, **straight stitch** and then move on to more advanced stitches as you become more confident.



Practice on scraps first

Before you start your project, practice your stitches and techniques on scraps of the **same material**.



Press your seams

Use **an iron** to press your seams. Pressing your seams is a crucial step in the sewing process. It helps to set the seam and gives your project a professional, polished look.



Lock Your Stitches

It might seem obvious, but all new sewers should get into the habit of locking their stitches, or *backstitching*. **Reverse sew** at the beginning and end of each seam to **lock your stitches** in place.

OOPS!

Take breaks. It is okay to make mistakes


Sewing can be tiring. Make sure you have **good lighting** and a **comfortable workspace**. Take breaks when you need them, to rest your eyes and hands, and to avoid fatigue and back pain.

If you make a mistake, **don't panic!** A seam ripper is a tool that is specifically designed to help you remove stitches without damaging the fabric.



Experiment and have fun

Sewing is a creative and rewarding hobby, so **enjoy the process!**

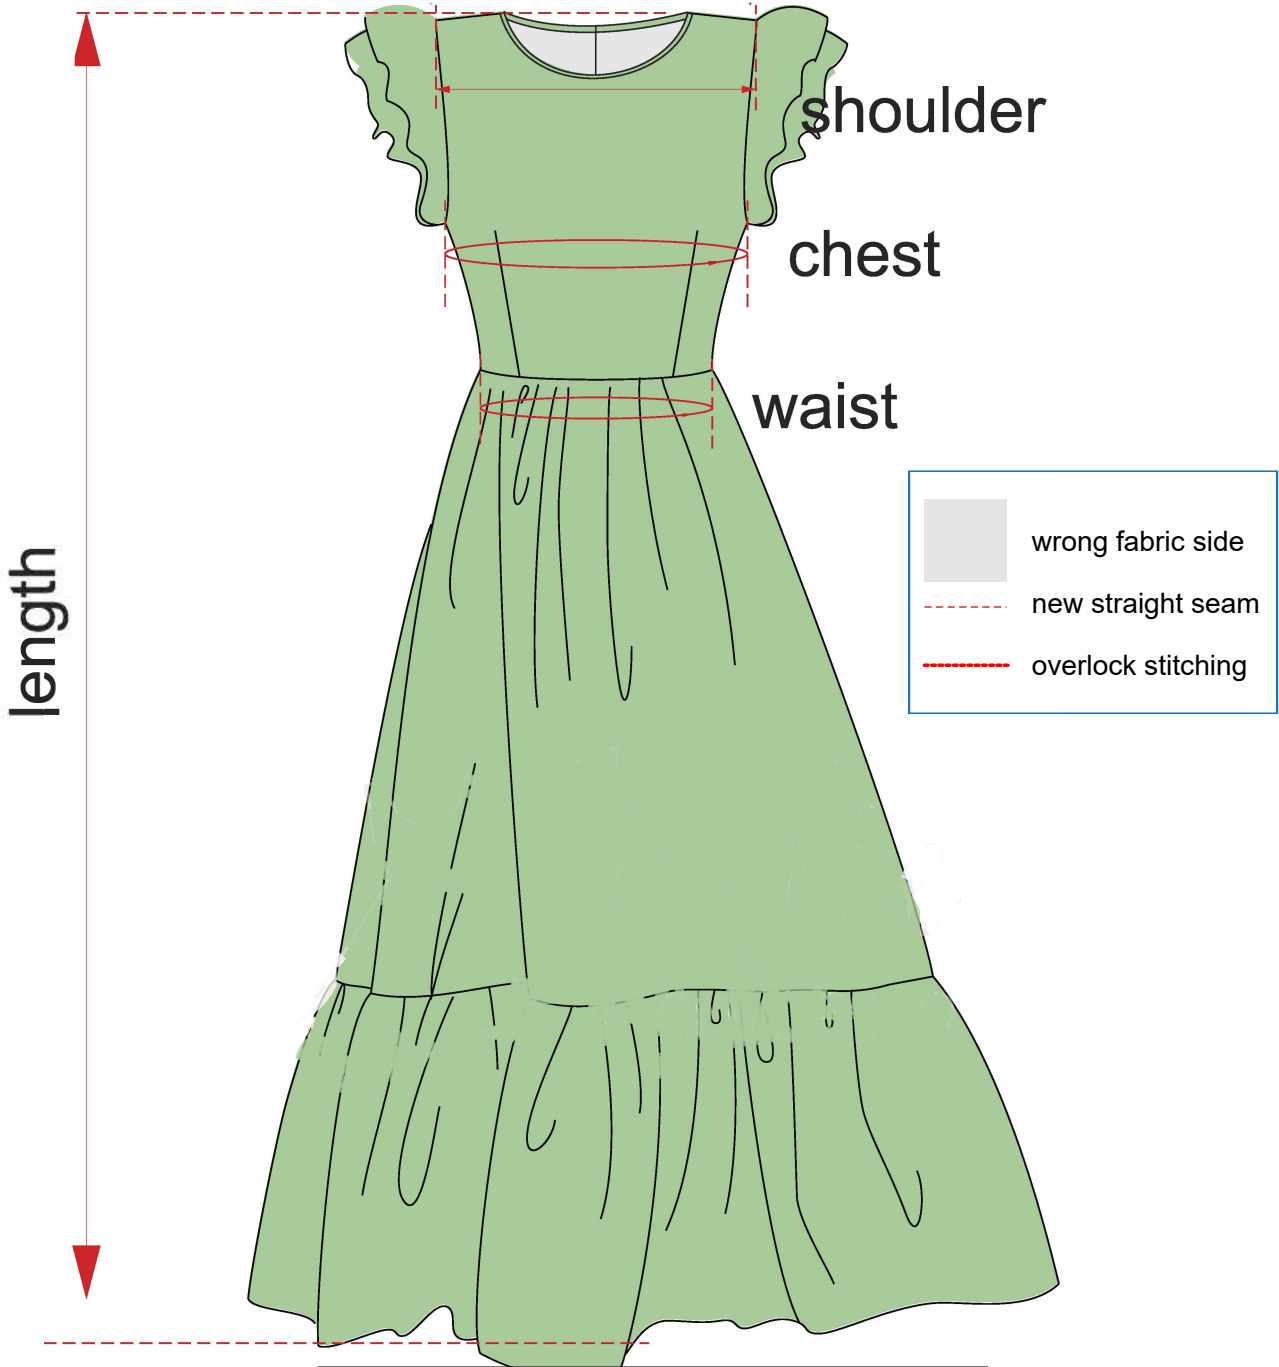

Size	Length (in/cm)	Chest (in/cm)	Waist (in/cm)	Shoulder (in/cm)
XS	46.5 / 118.1	36.2 / 92.0	28.0 / 71.1	13.8 / 35.1
S	47.2 / 120.0	37.8 / 96.0	29.5 / 74.9	14.2 / 36.1
M	48.0 / 121.9	39.4 / 100.1	31.1 / 79.0	14.6 / 37.1
L	48.8 / 123.7	40.9 / 103.9	32.7 / 83.0	15.0 / 38.1
XL	49.6 / 126.0	42.5 / 108.0	34.3 / 87.0	15.4 / 39.1
XXL	50.4 / 128.1	44.1 / 112.0	36.2 / 92.0	15.7 / 39.9
XXXL	51,2	45,7	38,2	16,1

FABRIC PIECES

FRONT A



BACK A



SLEEVE A




SLEEVE B




Supplies:
invisible zipper


FRONT B




BACK B



NECKLINE FACING



FLOUNCE

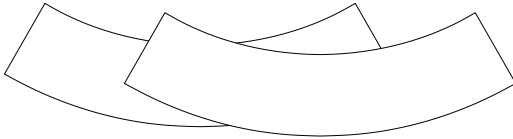



FABRIC CONSUMPTION

Fabric standard width: 1.65
yards / 150 cm

Minimum amount needed:
All sizes: 3.3 yards / 3.0 mts

Suggested patterns position

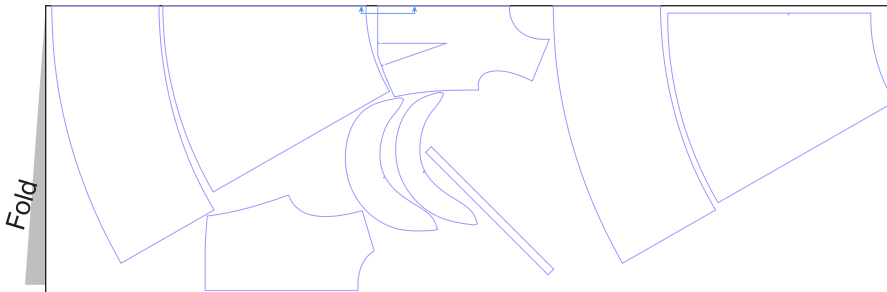


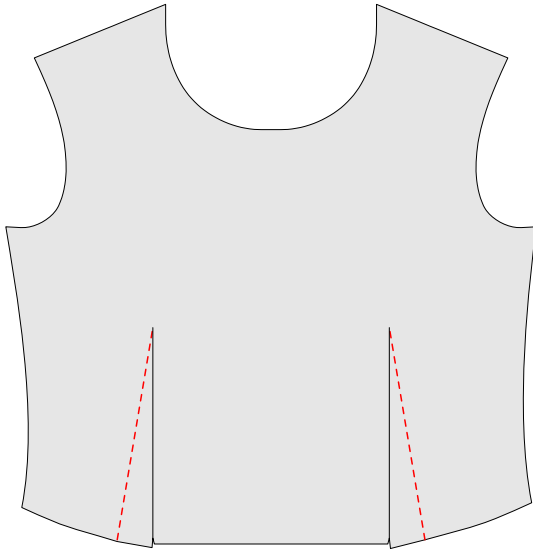


1. Sew the darts on the front detail starting from the edge. Press the darts towards the center.




2. Overcast the center edges of the back details.

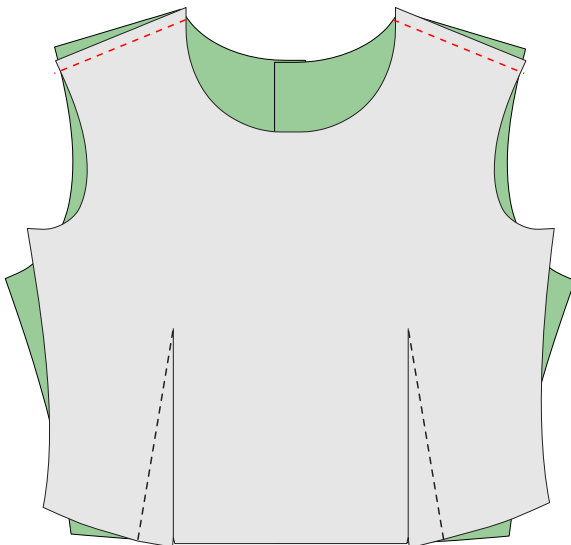

3. Match the front and back details with right sides of the fabric together and sew the shoulders at $\frac{3}{8}$ inches or 1cm. Overcast and press the seam allowances to the back.

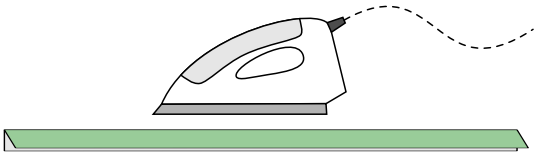


4. Fold the neckline facing by the length, facing the wrong sides of the fabric together, and press.

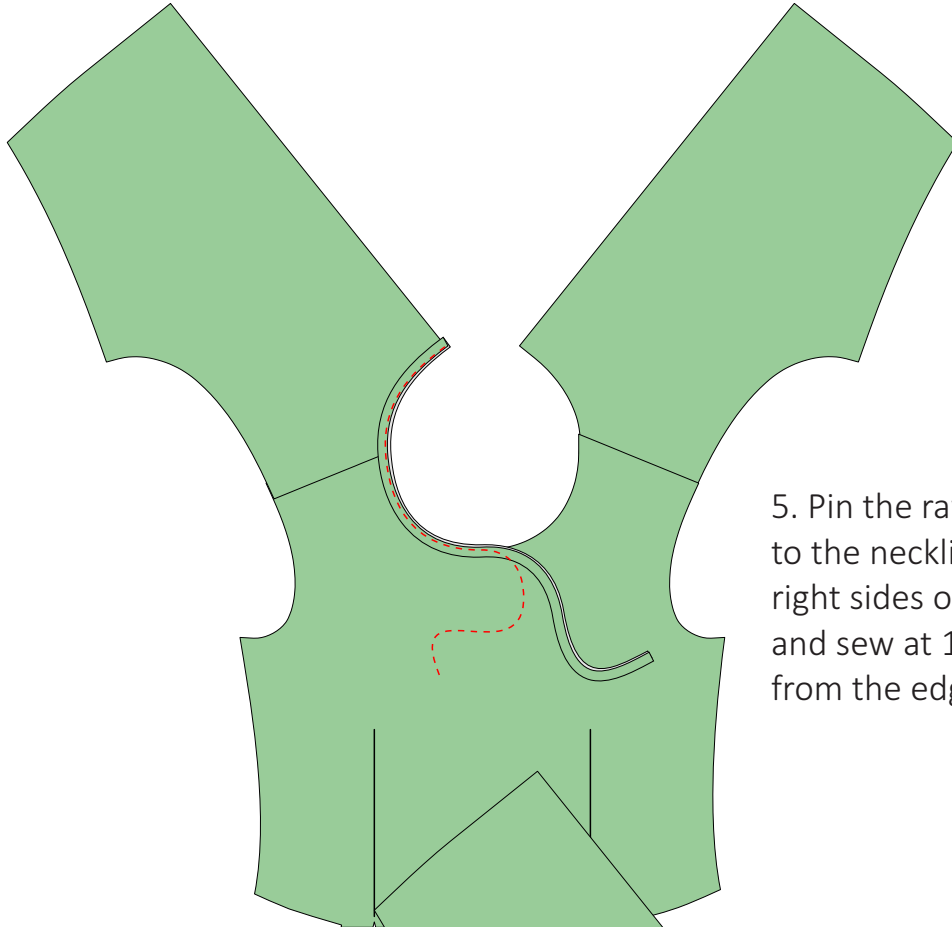


5. Pin the raw edges of the facing to the neckline, right sides of the fabric together and sew at 1/5 inches or 0.5cm from the edge.

Press the garment before and after every sewing step for a perfect finish


6. Make cuts on the neckline seam allowance to shape the neckline beautifully. Bend the facing and press.

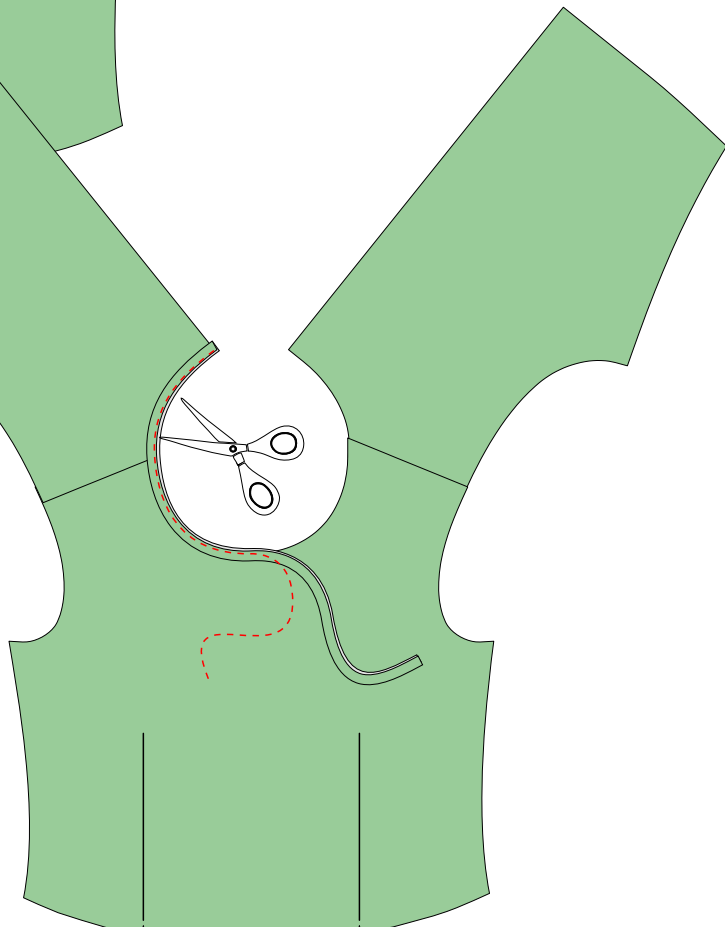

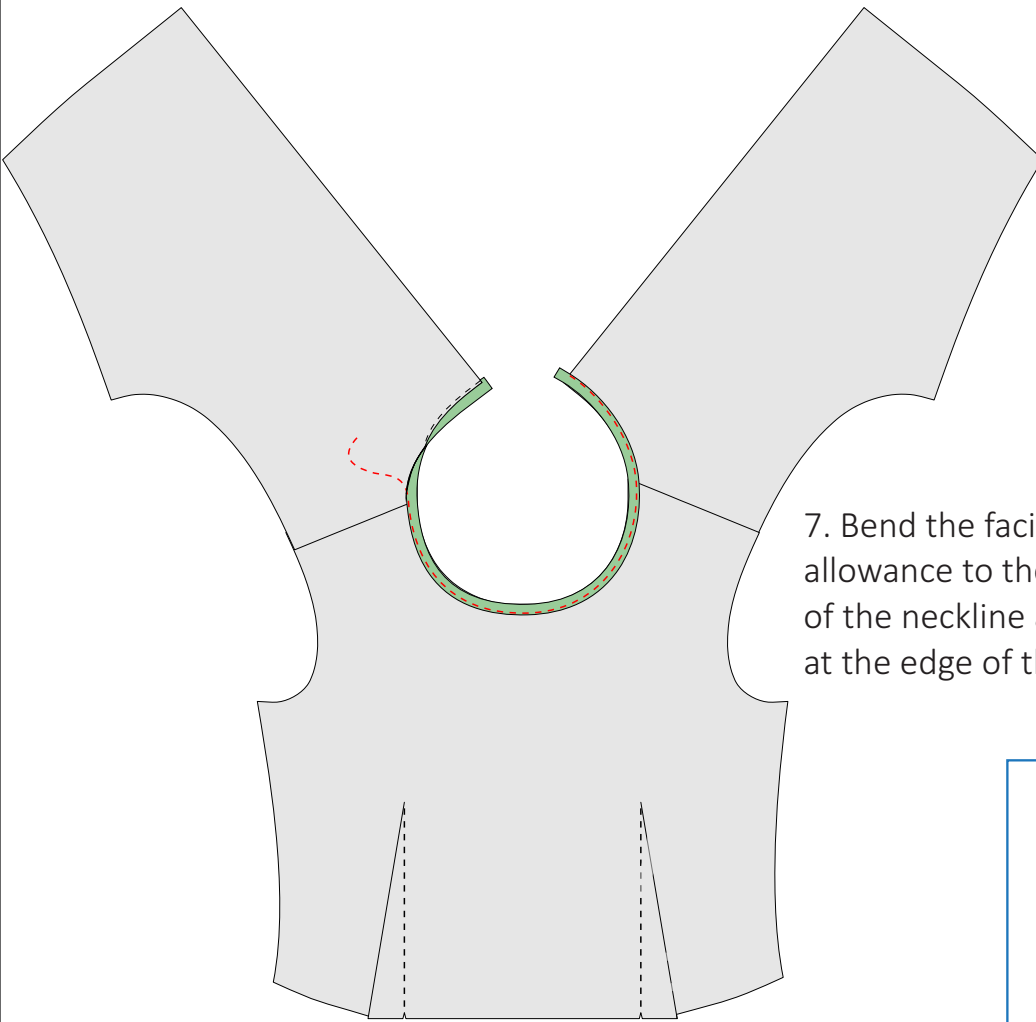



7. Bend the facing and the seam allowance to the wrong side of the neckline and make a topstitch at the edge of the facing.

Press the garment before and after every sewing step for a perfect finish

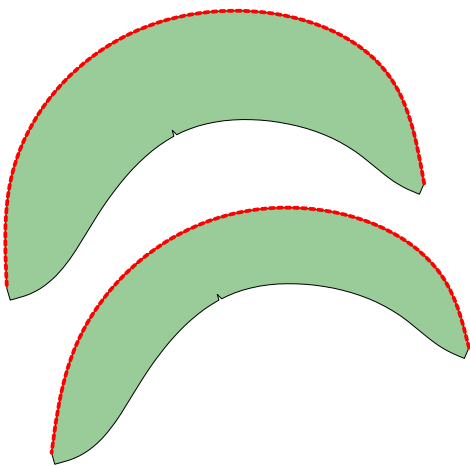


8. Overcast the long curved edges of the sleeve A and B details, bend and sew. Press to fix the shape.

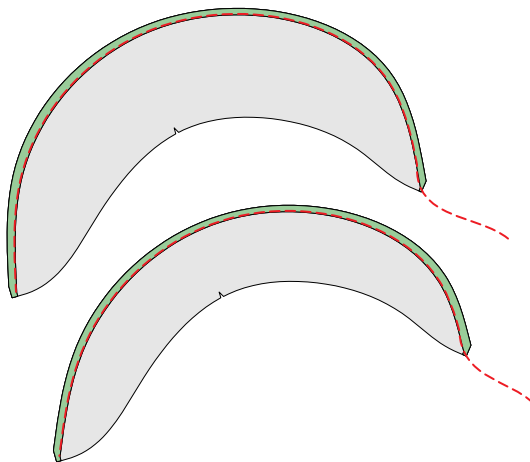

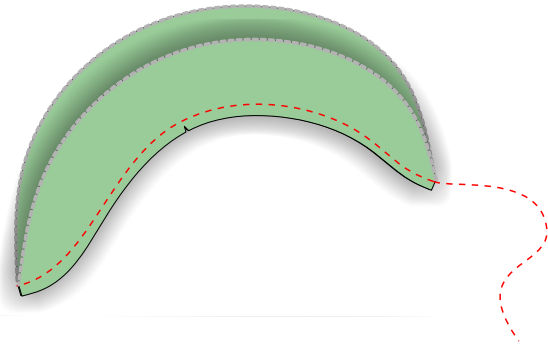


9. Place the sleeve A on the sleeve B and fasten raw edges.

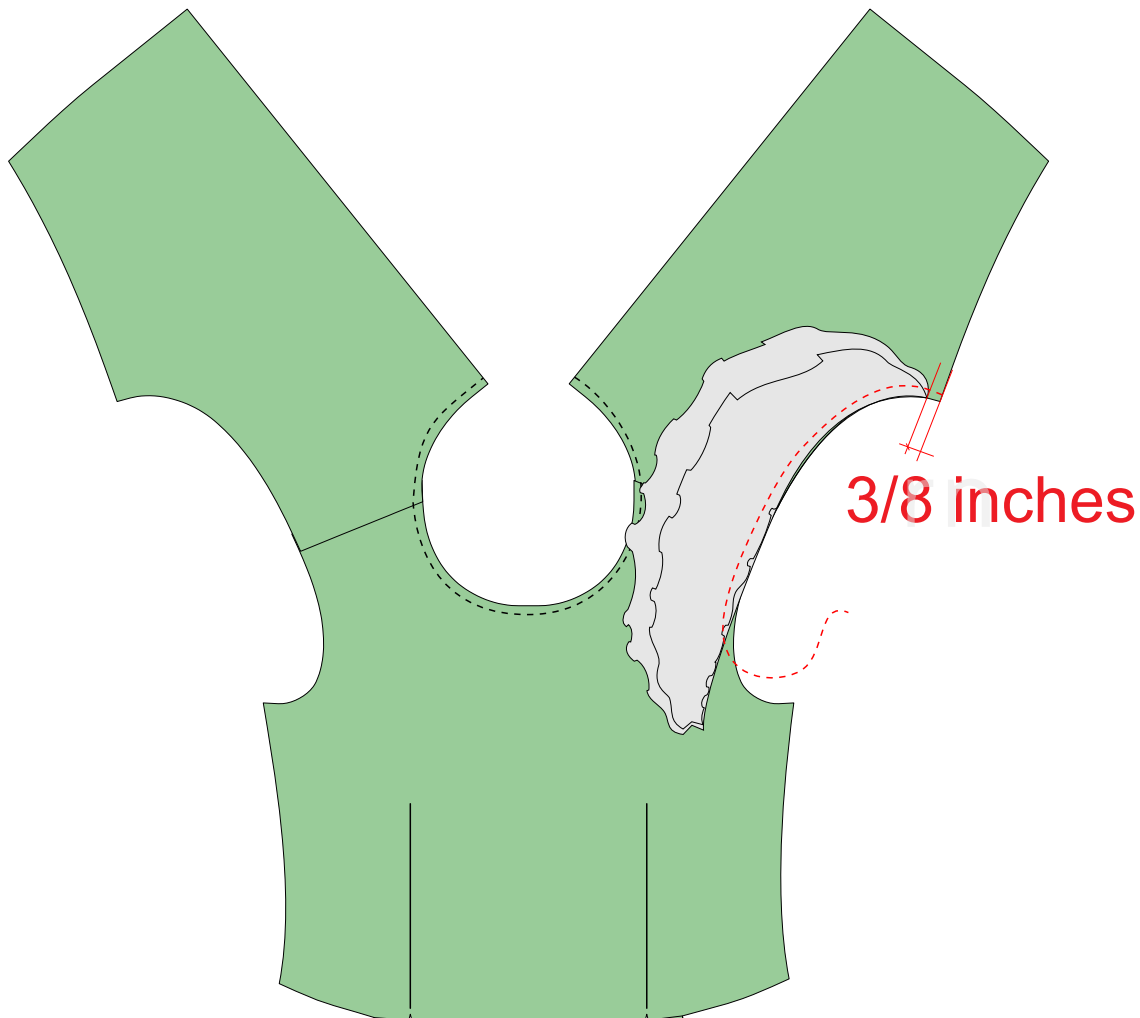

3/8 inches

10. Match the sleeves and the armholes as shown in the picture (leaving space for sewing the sides), facing the right sides of the fabric together, aligning the notches. Sew at 3/8 inches or 1cm. Overcast and steam the seam.

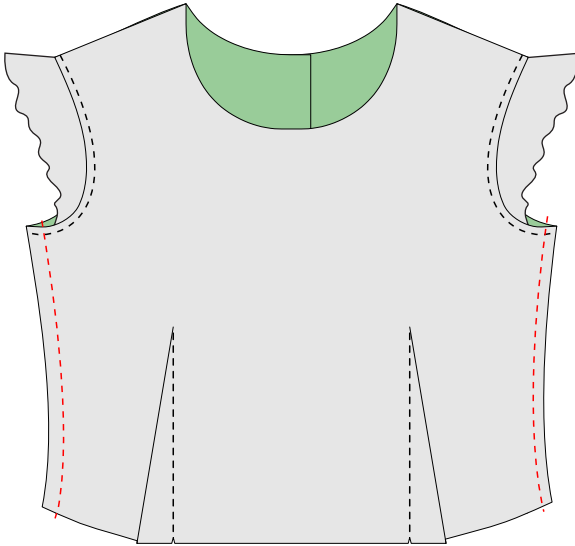


11. Sew the sides of the bodice stitching at $\frac{3}{8}$ inches or 1cm. Overcast and press the seam allowance to the back.


Press the garment before and after every sewing step for a perfect finish



12. Make a backstitch on the top of the side seams, fastening them on the back.

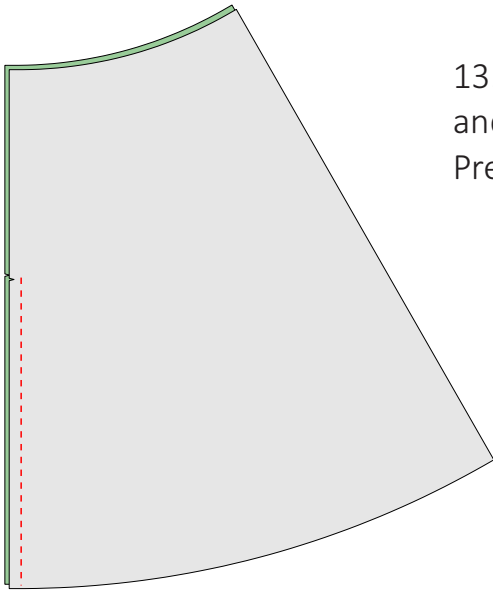


13. Overcast the back center edges of the back skirt and sew the center line of the skirt up to the notch. Press the seam allowance open.

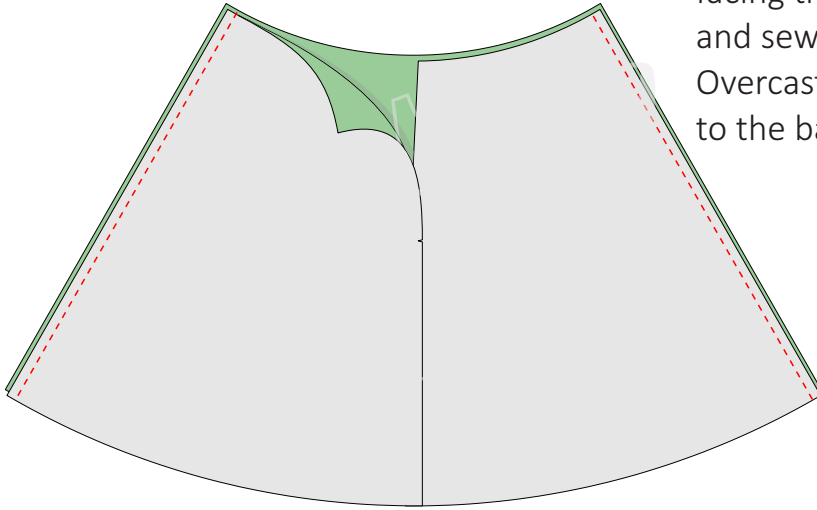


14. Match the front and back skirts facing the right sides of the fabric together and sew the sides at $\frac{3}{8}$ inches or 1cm. Overcast and press the seam allowances to the back.

15. Sew the front and back flounces in the same way.

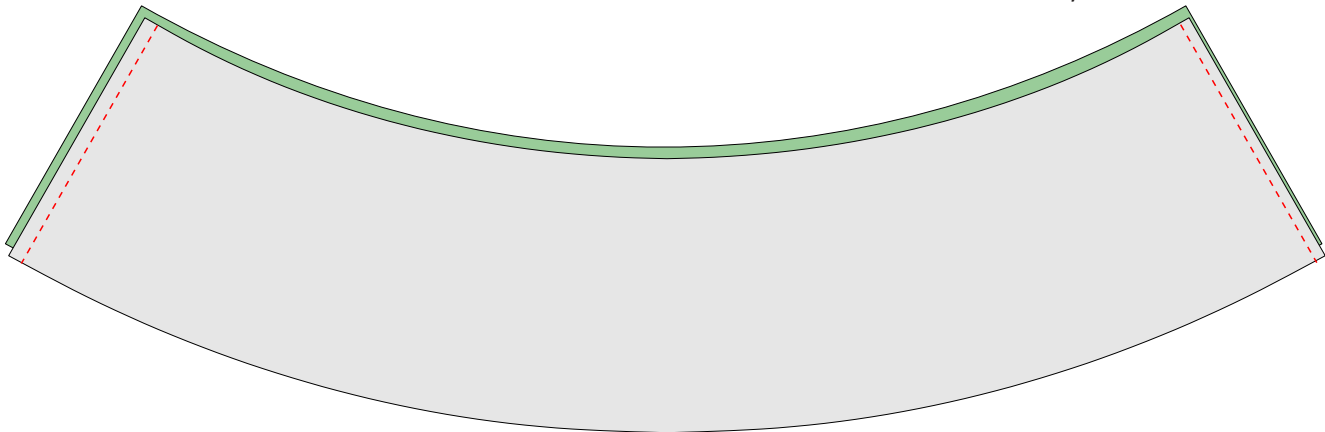


16. Make two stitches on the top edge of the flounces to gather them.


Check the length of the bottom edges of the front and back skirts, and gather the top edges of the front and back flounces to match that length.

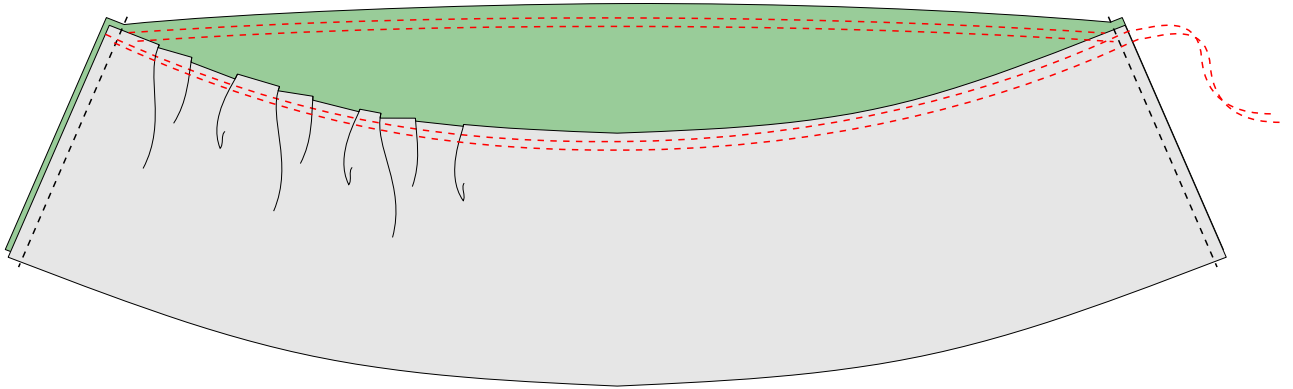


17. Fold the hem of the flounces twice at 1/4 inches or 0.6cm and stitch.
Press to fix the shape.

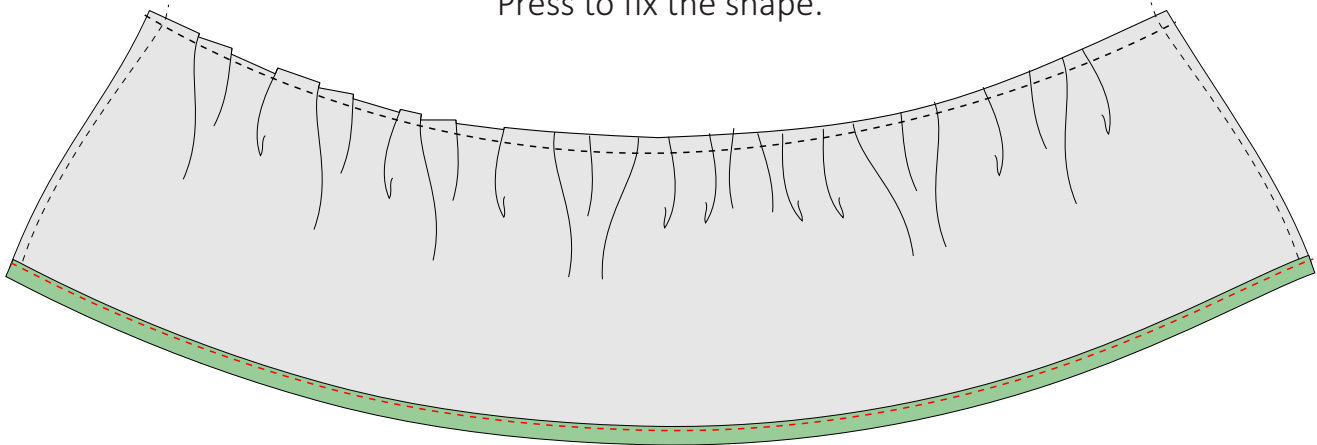


18. Match the flounces and the skirt facing the right sides of the fabric, aligning the side seams. Sew at $\frac{3}{8}$ inches or 1cm. Overcast and steam the seam allowance upwards.

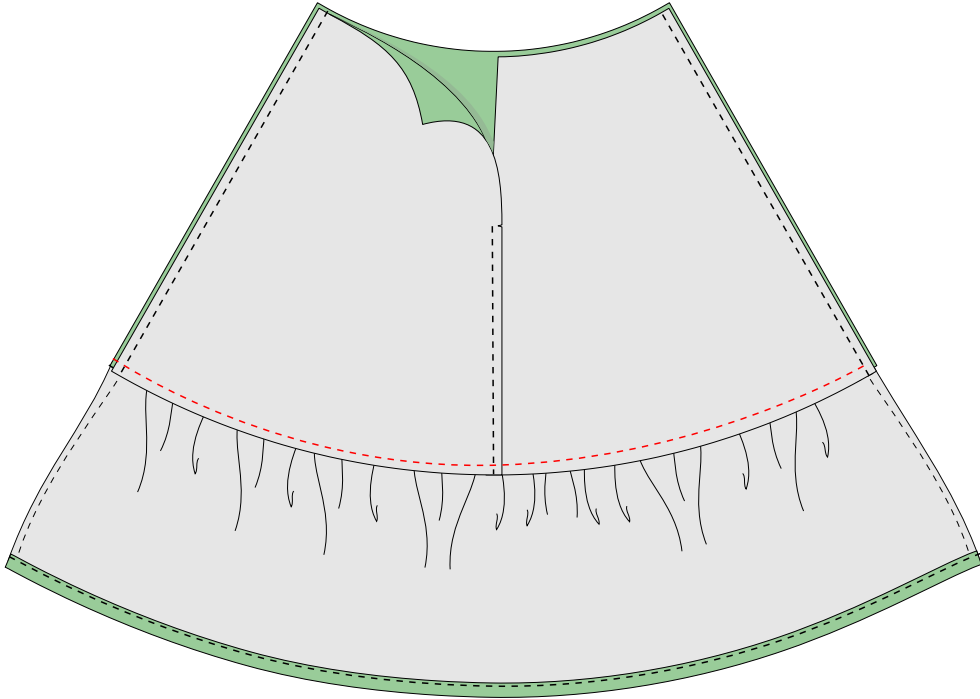

19. Make two stitches on the waistline of the skirt. Check the length of the front and back waistlines of the bodice and gather the waistlines of the front and back skirts to match that length.


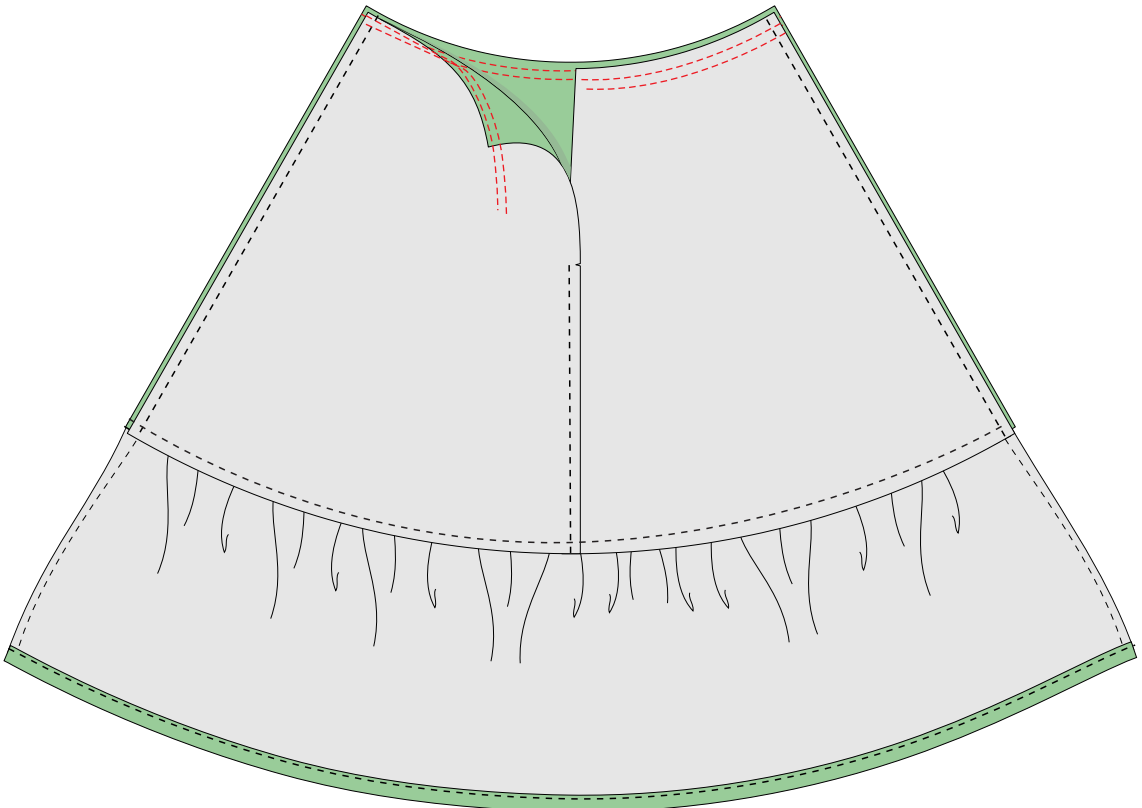


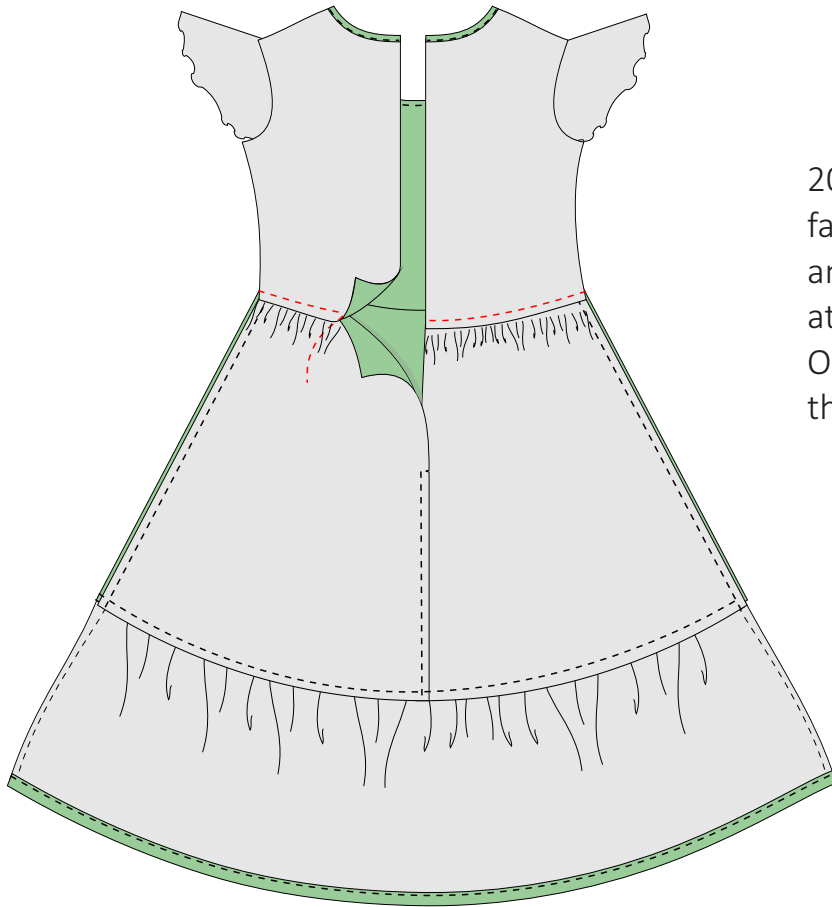


20. Match the bodice and the skirt facing the right sides of the fabric and sew the waistline at $\frac{3}{8}$ inches or 1cm. Overcast and steam the seam allowance upwards.

21. Face the right sides of the invisible zipper and fabric and pin, aligning the waistlines. Sew the zipper to the back center line using an invisible zipper sewing foot or one-sided foot.

22. Bend the top edges of the zipper to the wrong side and fasten. Steam the zipper.

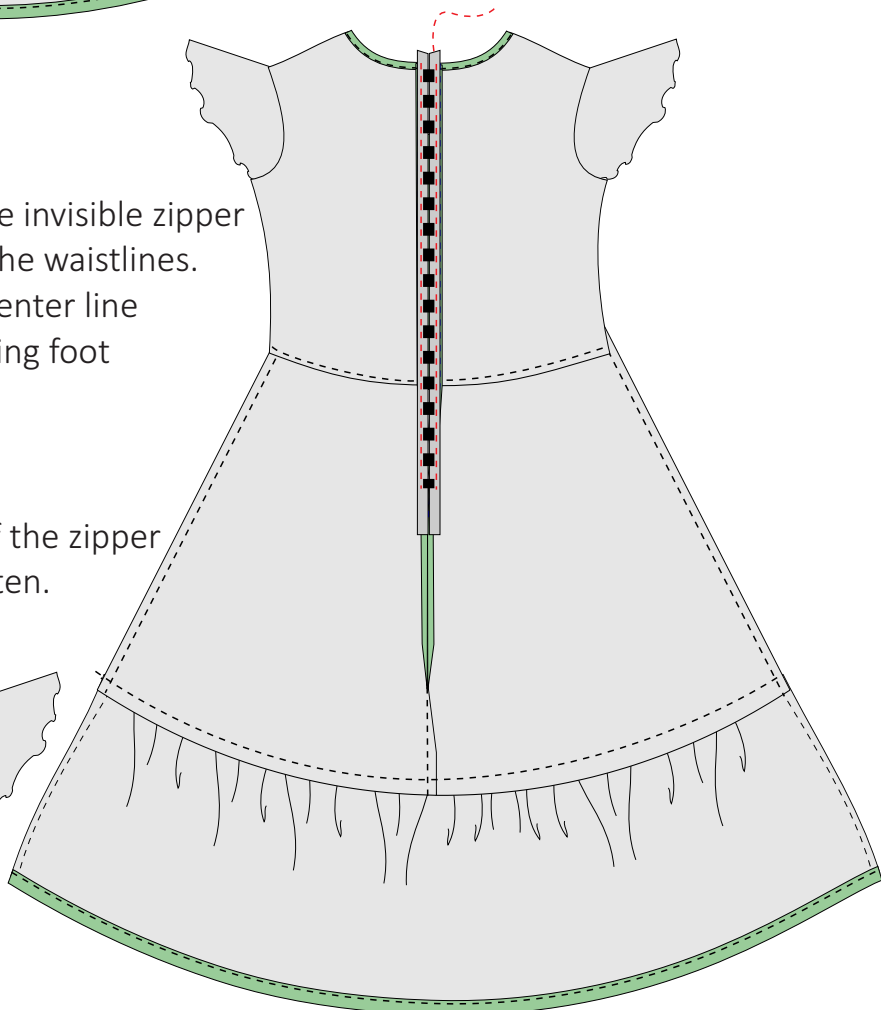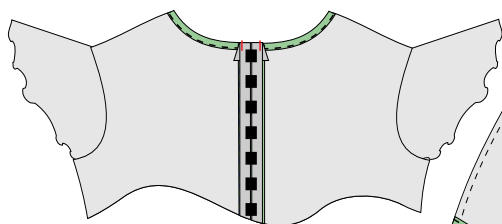

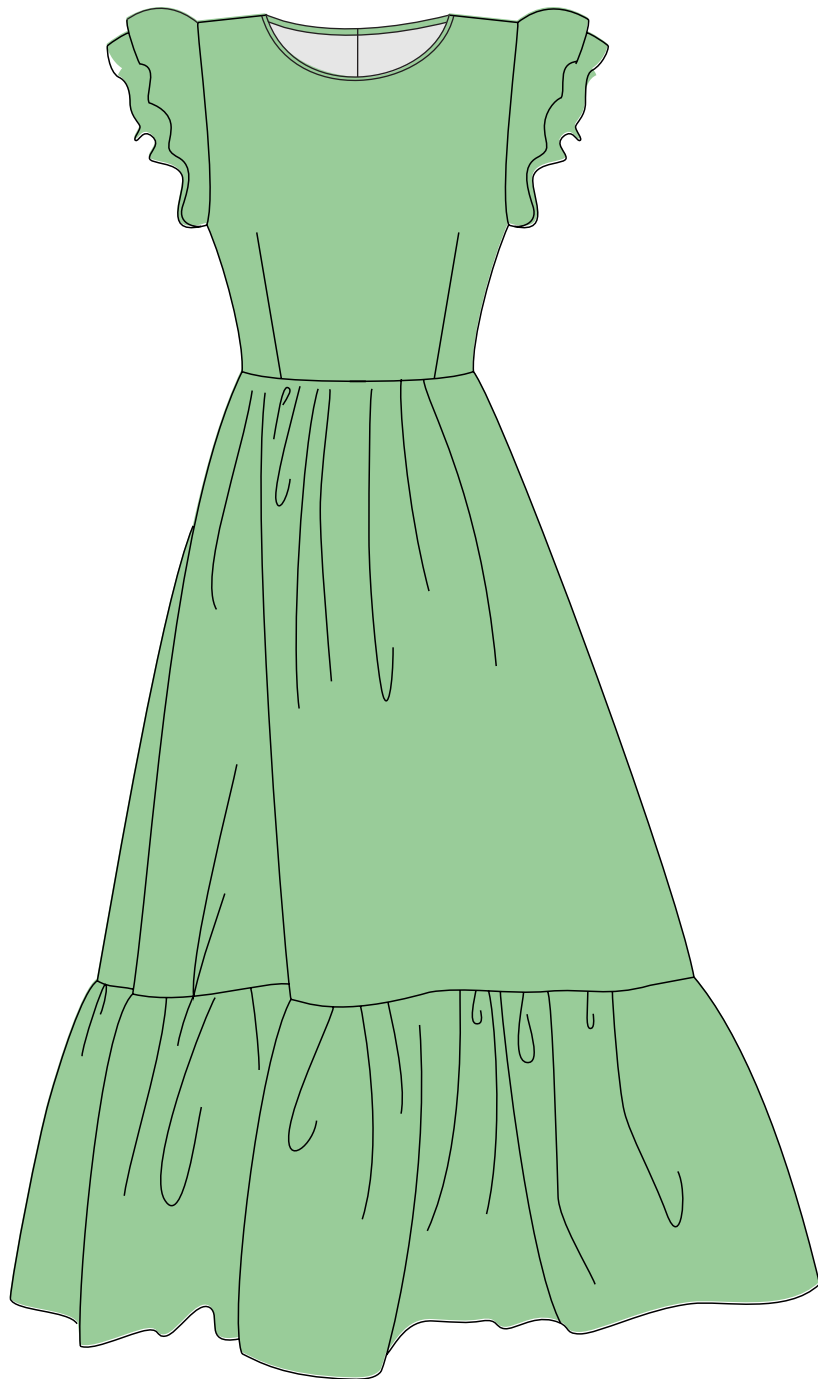

The dress is ready!